

FIRE-RATED OR FIRE/IMPACT SAFETY-RATED INSULATED GLASS UNIT (IGU)

FireLite IGU is composed of FireLite glass ceramic products and tempered or annealed float glass. Make-ups that achieve 3-hour fire ratings must be specified with FireLite NT or FireLite Plus®.

 **FIRE RATING**
20 - 180 MINUTES

 **ultraHD**
TECHNOLOGY

FEATURES

- ultraHD® Technology for improved surface quality, clarity and color
- Fire-rated for up to 180 minutes with required hose stream test
- Available in two surface grades: Premium and Standard
- Clear and wireless glass ceramic
- Impact safety-rated—meets ANSI Z97.1 and CPSC 16 CFR1201 (Cat. I and II)
- Withstands thermal shock
- Large sizes available
- Typical 1” thickness fits in Fireframes® Designer Series or Fireframes Hardwood Series from TGP, or standard fire-rated frames (variable thicknesses available)
- Available incorporating a variety of glass products, including (but not limited to): Tinted; Art Glass; One-Way Mirror; Low-E; Reflective; Lead Glass (X-Ray)
- May be lightly sandblasted or etched on one side without affecting fire rating
- 10-year limited warranty

NOTE: This product is not a barrier to radiant heat, as it does not meet test standards ASTM E119 or UL 263. If your jurisdiction requires a “barrier to heat” product, please contact TGP regarding Pilkington Pyrostop®.

SURFACE GRADES

Standard Grade - Polished for a surface quality that is comparable to alternative fire-rated ceramics marketed as having a premium finish.

Premium Grade - Finish ground and polished on both surfaces to provide superior surface quality, improving overall clarity and providing a surface that is unmatched by alternative products.

LISTINGS/STANDARDS

Classified and labeled by Underwriters Laboratories, Inc.® and Underwriters Laboratories of Canada. File number for labeled fire-rated assemblies is R13377. Tests performed in accordance with:

UL 9	NFPA 80	CAN/ULC-S104	LARR 25798
UL 10B	NFPA 252	CAN/ULC-S106	
UL 10C	NFPA 257		



BIM 3D Model



Fire-Rated



Hose Stream Tested



Positive Pressure Tested



Energy Efficient



Impact-Rated



UL Classified & Labeled



NORTH AMERICA'S
MOST SPECIFIED
FIRE-RATED GLASS COMPANY

MAXIMUM EXPOSED AREA

RATING	ASSEMBLY	MAX. EXPOSED AREA	MAX. WIDTH OF EXPOSED GLAZING	OR	MAX. HEIGHT OF EXPOSED GLAZING
20 to 60 min.	DOORS (non-temp rise)	3,204 in ² / 22.25 ft ² (2.07 m ²)	36" (914 mm)		89" (2,260 mm)
	DOORS (temp rise)	100 in ² / 0.69 ft ² (.06 m ²)	12" (304 mm)		33" (838 mm)
	OTHER THAN DOORS	3,325 in ² / 23.09 ft ² (2.15 m ²)	95" (2,413 mm)		95" (2,413 mm)
90 min.	DOORS (non-temp rise)	2,034 in ² / 14.13 ft ² (1.31 m ²)	36" (914 mm)		56-1/2" (1,435 mm)
	DOORS (temp rise)	100 in ² / 0.69 ft ² (.06 m ²)	12" (304 mm)		33" (838 mm)
	OTHER THAN DOORS	2,627 in ² / 18.24 ft ² (1.69 m ²)	56-1/2" (1,435 mm)		56-1/2" (1,435 mm)
180 min.	DOORS	100 in ² / 0.69 ft ² (.06 m ²)	12" (304 mm)		33" (838 mm)

Check with frame manufacturer for maximum tested glass sizes and required stop height.

Note: Individual lite sizes cannot exceed "Max. Exposed Area" shown above.

GENERAL CHARACTERISTICS

GENERAL CHARACTERISTICS				
U-VALUE	Similar to standard insulating units with a make-up of 1/4" float glass - 1/2" air space - 1/4" float glass (6.4 mm float glass - 12.7 mm air space - 6.4 mm float glass) Summer U-value: Approximately .55* Winter U-value: Approximately .49*			
STC RATING	3/16" (5 mm) FireLite	9/16" (14.23 mm) air space	1/4" (6.4 mm) float glass	35**
	3/16" (5 mm) FireLite NT	9/16" (14.23 mm) air space	1/4" (6.4 mm) float glass	35**
	5/16" (8 mm) FireLite Plus	9/16" (14.23 mm) air space	1/4" (6.4 mm) float glass	38**

*U-values increase with use of high performance float glass products

** Values were not achieved with these specific make ups

LABELING

Each unit of FireLite IGU shall be permanently labeled with the FireLite IGU logo, UL logo and fire rating.

MAXIMUM SHEET SIZE

SURFACE FINISH	Premium	Standard	Obscure
	48" x 96" (1.21 m x 2.43 m)	48" x 96" (1.21 m x 2.43 m)	36" x 96" (.91 m x 2.43m)

INSTALLATION


FireLite IGU shall be glazed into the appropriate fire-rated framing with an approved glazing compound (closed cell PVC tape) as supplied by the installer. For 90 minute ratings that exceed 1,393 in² (.8987 m²) FireLite IGU shall be glazed with fire-rated glazing tape as supplied by TGP.

NOTE: Pure silicone can be used for a cap seal or cap bead.

Inspect each piece of FireLite IGU immediately before installation and eliminate any with observable edge damage or face imperfections. As with any glass produced by the "roll out" method, individual pieces of FireLite IGU may contain minimal variations in thickness. Occasionally, process marks and small occlusions or seeds (bubbles, knots or crystals) may be apparent. However, since they do not generally impair the transparency or affect the technical performance of the glass, they do not represent cause for rejection.

Detail based on use of Fireframes Designer Series narrow profile framing

Glazing Thickness:	3/16" - 1" (5 mm - 25.4 mm)
a. Frame width:	2" (51 mm)
b. Frame height:	2-3/4" (70 mm)
c. Stop height:	3/4" (19 mm)
d. Pocket width:	1/2" - 1-1/4" 12.7 mm x 31.8 mm)
e. Edge clearance:	1/4" (6.4 mm)
f. Bite:	1/2" (12.7 mm)

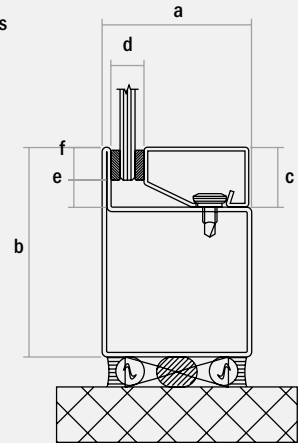

STORAGE & HANDLING

FireLite IGU must be handled with care during transportation, storage, inspection and installation. Store in a dry place.